

BLUETTI



BLUETTI AC60P

600w Expandable Portable Power Station

Unleash Outdoor Possibilities




Water-resistant



Dustproof

IP65-Rated Water-resistant & Dustproof Power Station



Flexible

504Wh-2116Wh
Customizable battery capacity




Powerful

Added wireless charging
To Accommodate all charging ways




Safe

Lithium iron phosphate battery
Ensures electrical safety



Exquisite

Unique Mini design
Showcasing elegant outdoor spirit



200W maximum solar input


The maximum solar input is 200W
Extra battery capacity for outdoor



Smart

Remote control via APP
User-friendly and convenient

Built for outdoor adventures, AC60P is an all-weather solar generator, supplying 600W power from its 504Wh LFP battery, which can be expanded to 2116Wh via adding two B80 packs. With super fast charging, you can stay powered for long periods in the wild.



AC60P SPECIFICATION

Maximum Input	600W
Capacity	504Wh
Charging Temperature	0°C to 40°C
Discharging Temperature	-20°C to 40°C
Dimension	290 x 205 x 234mm
Net Weight	8.6kg
AC Output Voltage	JP: 100V US: 120V EU/UK: 230V AU: 240V
AC Output Current	JP: 6A US: 5A EU/UK: 2.6A AU: 2.5A
AC Output Frequency	50/60Hz


DC Output

Cigarette Lighter Port *1	Voltage	12V
	Power	120W
USB-A *2	Voltage	5V
	Current	3A
Type-C *1	Output	5V/9V/12V/15V/20VDC/3A 20VDC/5A
Wireless charging Port *1	Power	15W

DC Input

Maximum Input	200W
Voltage	12V~28V
Current	8.2A

*Specifications are subject to change without notice

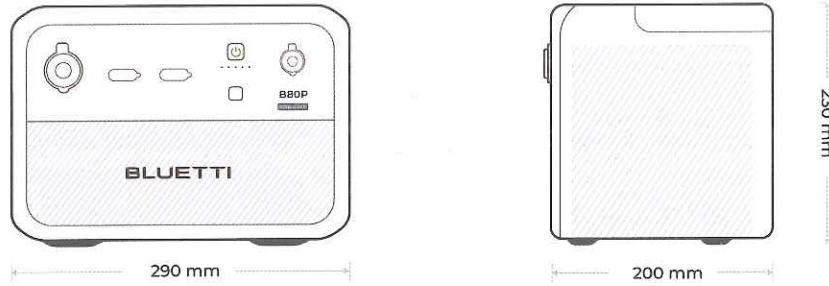

B80P SPECIFICATION

Battery	LiFePO ₄
Capacity	806Wh
Charging Temperature	0°C to 40°C (32°F to 104°F)
Discharging Temperature	-20°C to 40°C (-4°F to 104°F)
Dimension	290 x 200 x 230mm
Net Weight	9.8kg

DC Output

Cigarette Lighter Port *1	Power	120W
	Voltage	12V
	Current	10A
USB-A *1	Output	18W, 5V/3A 9V/2A 12V/1.5A
USB-C *1	Output	5V/9V/12V/15V/20VDC/3A 20VDC/5A

PV/DC Input

Power	200W
Voltage	12V~28.8V
Current	8.2A±0.3A

Compliance & Certification

Compliance	NA: UL, FCC, TSCA+CA65, DOE+CEC+NRCAN EU: CB+IEC, CE, RoHS, REACH UK: UKCA JP: PSE KR: KCC AUS: RCM MX: NOM
IP Rating	IP65

* Specifications are subject to change without notice

Shenzhen Poweroak Newener Co.,Ltd

19F, Block A, KaiDaEr Bldg., No.168 Tong Sha Rd, Xili Street, Shenzhen, Guangdong, China

www.bluettipower.com
 feedback@poweroak.net
 +1 702-463-4792

© 2023 BLUETTI POWER INC. All rights reserved.

@BLUETTI_GLOBAL
 @bluettipower
 @BLUETTI_OFFICIAL
 @BLUETTIofficial

